




UPC Code : 078477233306

Country Of Origin : Please Contact Customer Service.



#### Available Colors :



## 5325-W

15 Amp Decora Duplex Outlet

15 Amp, 125 Volt, NEMA 5-15R, 2-Pole, 3-Wire, Decora Duplex Receptacle, Straight Blade, Residential Grade, Grounding, Quickwire Push-In & Side Wired, Steel Strap - White

- EASY - Quick wire push-in and side wiring for easy installation
- DURABLE - Impact-resistant thermoplastic nylon construction
- CONVENIENT - Shallow depth for maximum wiring room
- COMPATIBLE - For use with Leviton Decora wallplates

### Technical Information

#### Electrical Ratings

**Amperage** : 15 A

**Voltage** : 125 VAC

#### Environmental Specifications

**Flammability** : Rated V-2 per UL 94

**Operating Temperature** : -40°C to 60°C

#### Material Specifications

**Body Material** : Thermoplastic

**Color** : White

**Face Material** : Thermoplastic

**Ground Clips** : Brass-Plated

**Grounding Screw** : Steel 8-32

**Strap Material** : Steel

**Terminal Screws** : Brass

#### Mechanical Specifications

**Grounding** : Grounding

**Terminal Accom.** : 14-12 AWG

**Terminal ID** : Brass-Hot, Green-Ground, White-Neutral

#### Product Features

**Amperage** : 15 A

**Body Material** : Thermoplastic

**Color** : White

**Face Material** : Thermoplastic

**NEMA** : 5-15R

**Pole** : 2

**Strap Material** : Steel

**Termination** : Quickwire Push-In & Side

**Type** : Duplex Receptacle

**Voltage** : 125 VAC

**Warranty** : 2-Year Limited

**Wire** : 3

#### Standards and Certifications

**CSA C22.2 No. 42** : File 152105; Class 6233-01

**NOM** : NOM Certified

**NOM Certified** : 057


**UL 498** : File E13399

**UL Listed** : File E-13399


### Features and Benefits

- Terminal screws accept up to #12 AWG copper or copper-clad wire
- Quickwire push-in terminals accept #14 AWG solid copper wire only
- Shallow depth for maximum wiring room
- Double-wipe power contacts for reliable conductivity and plug retention
- Heavy-gauge zinc-plated steel mounting strap
- Additional material added to strap to help reinforce and prevent excessive bending of the break-off tabs
- Limited 2-year warranty

## Dimensional Diagram

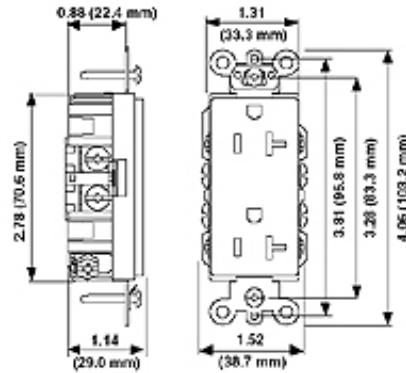

## Wiring Diagram

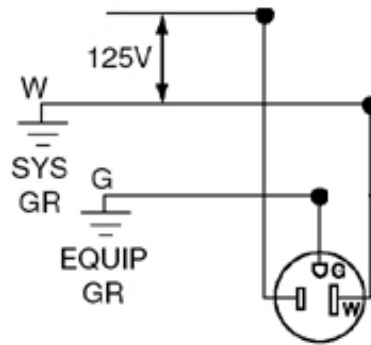

5-15R

## SPECIFICATION SUBMITTAL

|                      |                      |                      |
|----------------------|----------------------|----------------------|
| JOB NAME:            | CATALOG NUMBERS:     |                      |
| <input type="text"/> | <input type="text"/> | <input type="text"/> |
| JOB NUMBER:          | <input type="text"/> | <input type="text"/> |

### Leviton Manufacturing Co., Inc.

201 North Service Road, Melville, NY 11747

Telephone: +1-800-323-8920 · FAX: +1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S.T. Monday-Friday): +1-800-824-3005

### Leviton Manufacturing of Canada, Ltd.

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: +1-800-469-7890 ·

FAX: +1-800-824-3005 · [www.leviton.com/canada](http://www.leviton.com/canada)

### Leviton S. de R.L. de C.V.

Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52)5386-1797 · [www.leviton.com.mx](http://www.leviton.com.mx)

Visit our Website at: [www.leviton.com](http://www.leviton.com)

© 2018 Leviton Manufacturing Co., Inc. All Rights Reserved. Subject to change without notice.

### Leviton has a global presence.

If you would like to know where your local Leviton office is located please go to:

[www.leviton.com/international/contacts/](http://www.leviton.com/international/contacts/)

