

# 7" Spin Light™ with Pull Chain

830 lms | 120VAC | Model 54484141 | Part SLP-7-11-840-SV-N


- > Energy Saving 11.5 Watt Integrated LED
- > Uses 81% Less Energy than Equivalent 60 Watt Incandescent Bulb
- > Cool White 4000k CCT
- > Lasts 45.6 years or 50,000 Hours Continuous Use
- > Maintenance Free — No Bulb Replacements
- > 5 Year Limited Warranty
- > US Patent # 9500352, 9541270, D776326
- > CND Patent # 169113



## SPECIFICATIONS

Model	54484141
Part	SLP-7-11-840-SV-N
Description	7" Spin light with pull chain- Non-Dimmable
Input Voltage (VAC)	120
Wattage	11.5
Average Rated Life <sup>1</sup>	50,000 hours
Typical Lumens <sup>2</sup>	830
CCT <sup>3</sup>	4000k
Location Rating	UL Damp
CRI <sup>4</sup>	80
Beam Angle	120
Operating Temperature	Min -4°F (-20° C), Max 95°F (35° C)
Power Factor	>0.9
R9	23
DUV	0.00015
Operating Frequency (Hz)	60

1 Hours lifetime with 70% lumen maintenance  
 2 Thermally stable typical lumens (±10%)  
 3 Thermally stable CCT (±10%)

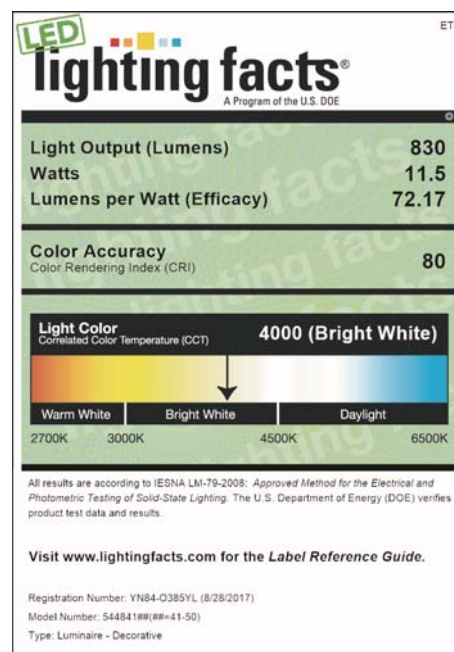

**TO ORDER:**  
[www.ETiSSL.com](http://www.ETiSSL.com)  
 Call: 1.855.ETi.SSLI  
 1.855.384.7754





# 7" Spin Light™ with Pull Chain

830 lms | 120VAC | Model 54484141 | Part SLP-7-11-840-SV-N

## SHIPPING INFORMATION

Model	54484141
Part	SLP-7-11-840-SV-N
UPC	849489002125
Product Dimensions (L x W x H in.)	7.01 x 7.01 x 3.54
Product Dimensions (L x W x H cm.)	17.8 x 17.8 x 9.0
Product Weight (lbs.)	0.77
Inner Carton Quantity	N/A
Inner Carton Bar Code	N/A
Inner Carton Dimensions (L x W x H in.)	N/A
Inner Carton Dimensions (L x W x H cm.)	N/A
Inner Carton Weight (lbs)	N/A
Master Carton Quantity	5
Master Carton Bar Code	50849489002113
Master Carton Dimensions (L x W x H in.)	20.51 x 7.91 x 8.27
Master Carton Dimensions (L x W x H cm.)	52.1 x 20.1 x 21.0
Master Carton Weight (lbs)	5.94
Pallet Quantity	300

## AVAILABLE ACCESSORIES

Model	Description
95448414101	Diffuser Lens

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. For FCC Part 15 user information, Please see [www.ETiSSL.com/fcc15b](http://www.ETiSSL.com/fcc15b)

**TO ORDER:**  
**[www.ETiSSL.com](http://www.ETiSSL.com)**  
**Call: 1.855.ETi.SSLI**  
**1.855.384.7754**

**ETi Solid State Lighting, Inc.**  
**720 Corporate Woods Parkway**  
**Vernon Hills, IL 60061**  
**Phone: 855.384.7754**  
**Fax: 847.383.6256**