



WATER MATRIX™
THE FUTURE OF WATER SOLUTIONS

PRODUCT SPECIFICATIONS

Model No.	PROFICIENCY COMFORT HEIGHT
N7799	Comfort Height, ADA-Compliant Elongated Front, 3.6 lpf Single-Flush, Two-piece Rear Outlet Toilet

FEATURES



ULTRA HIGH EFFICIENCY FLUSH

Our patented air transfer system delivers a swift and quiet, yet powerful flush with just 3 litres of water.



SOFT-CLOSE SEAT

The toilet lid and seat close with a light touch, preventing slamming. Moulded with durable, heavy-duty break-resistant plastic.



LARGE WATER SURFACE

Air is transferred to the trapway during filling of the tank, exerting positive pressure on the water in the bowl and creating a larger surface.



COMPACT DESIGN

Install and renovate with ease. Have more room for vanities, shelving, or cabinets.



SUPERIOR ENGINEERED CERAMICS

High-glazed vitreous china provides a smooth, low-friction surface.



STYLISH FLUSH BUTTON

Inconspicuous, top-mounted, break-resistant, spring-loaded, and finished in polished chrome.



**Hennessy
& Hinchcliffe**



**BUILD
GREEN**

accrue LEED
Canada credit
points:

UP TO
6

LEED POINTS
For commercial
buildings

UP TO
2

LEED POINTS
For residential
buildings





Model No.	PROFICIENCY COMFORT HEIGHT
N7799	Comfort Height, ADA-Compliant Elongated Front, 3.6 lpf Single-Flush, Two-piece Rear Outlet Toilet


PERFORMANCE

The Proficiency harnesses the energy of water filling the tank to pressurize the trapway via a patented air transfer system. When flushed, air is sucked out of the trapway, initiating the highly efficient siphonic action. This new technology gives the Proficiency the leading edge in water efficiency, achieving the lowest flush volume of any toilet in the industry.

SPECIFICATIONS

Water Usage	3.6 lpf / 0.95 gpf
Flush System	Patented Air Transfer System - Canadian-engineered
MaP Rating	800g
Water Pressure Range	Variable
Water Surface Area	7¼" X 9¼" (184 mm X 235 mm)
Trap Diameter	2" (51 mm)
Trap Seal	2-3/8" (60 mm)
Rough-In	25.2" X 10.2" (640 mm X 260 mm)
Large Footprint	High glaze vitreous china
Material	White
Colours	Lifetime on china
Warranty	10-year warranty on air transfer system; 1-year on valves
 	
Eligible for the highest tier of municipal toilet rebates, where available Complies with ASME A112.19.2 and CSA B45 codes and surpasses standards for MaP and drainline carry capacity	

DIMENSIONS

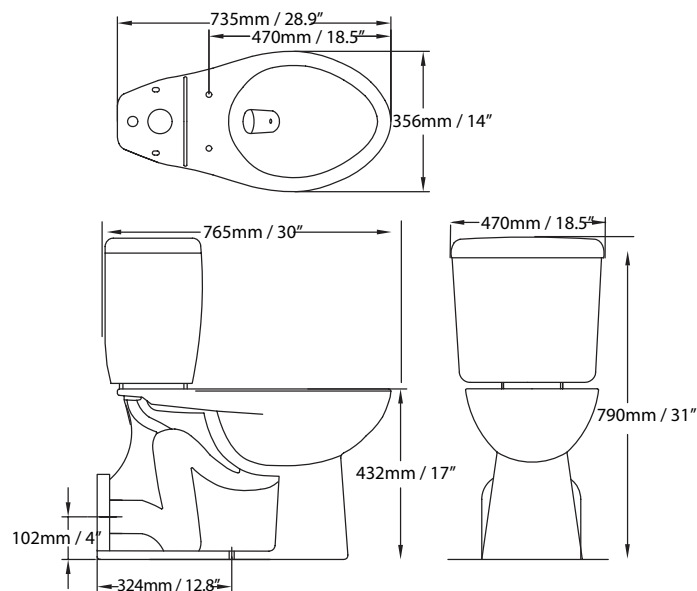

Ultra High Efficiency Toilet
UHET

SHIPPING DIMENSIONS & WEIGHT

N7714 TANK

19" x 11" x 18"
(483mm x 279mm x 457mm)
35 lbs. (15.9 kg)

N7799 BOWL

30" x 16" x 19"
(762mm x 406mm x 483mm)
60 lbs. (27.2 kg)
Seat Included

Specifications are subject to change without notice.

Distributed & marketed by:



WATER MATRIX™
THE FUTURE OF WATER SOLUTIONS

555 Hanlan Road, Unit 1, Vaughan, Ontario Canada L4L 4R8
Tel: (905) 850-8080 Fax: (905) 850-9100 Toll-Free: 1-800-668-4420
Email: sales@watermatrix.com Website: www.watermatrix.com